


1 External and key function description

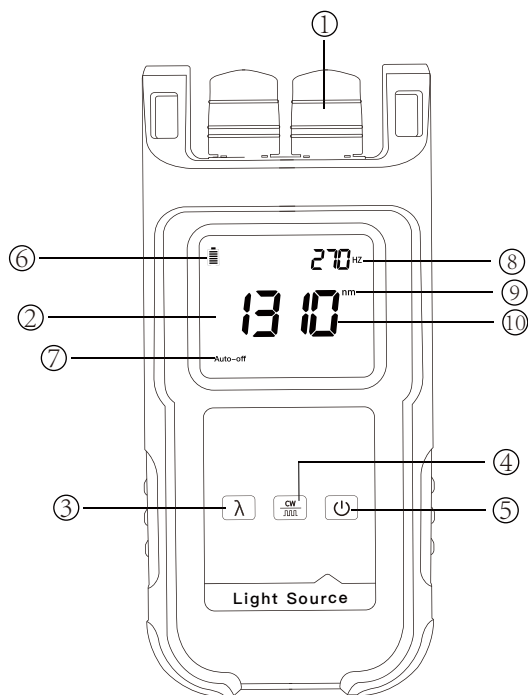


- ① OLS interface: laser light source output port
- ② Display: display test results and other information
- ③ Enter key: switch between 7 different output wavelength tests.
- ④ $\frac{CW}{\square\square\square}$ key: switchable carrier frequency 270Hz/ 1kHz/ 2kHz
- ⑤ On/off key: turn on or off the device
- ⑦ automatic shutdown
- ⑨ unit
- ⑥ power supply battery
- ⑧ frequency
- ⑩ wavelength

2 Power-on and power-saving function settings

Auto-off



The equipment will turn on after pressing the "⏻" key. Press this button again for more than two seconds to shut down.

This instrument has power saving function, normal there is no operation for about ten minutes after booting, The device will automatically shut down. If you need a screen Shield this function to keep the equipment working all the time Status, just short press "on" when booting Key, "Auto-off" at the bottom left of the meter display. Disappearing means that the power saving function is cancelled.

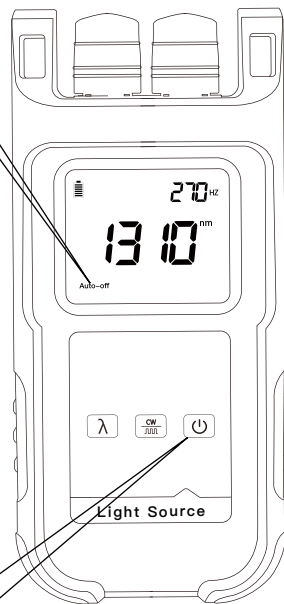

3 Backlight control


In the power-on state, the backlight will automatically turn off after a period of time. After turning off, press any key to activate the backlight. The backlight is used to illuminate the instrument display at night or in dark places.

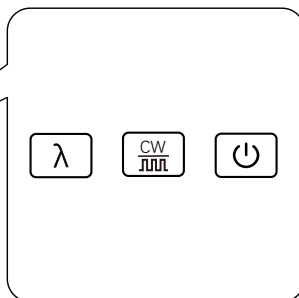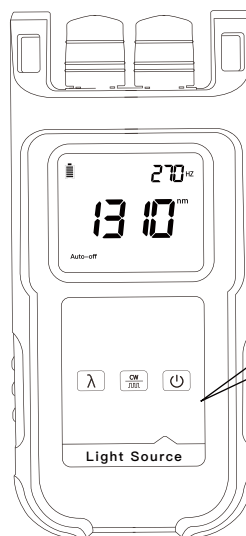

4 Wavelength selection

1310 nm
1550 nm


According to the needs of the project, select the corresponding wavelength to match the optical power meter. After the meter is turned on, press the "output wavelength" key, the output wavelength and length will be switched to the corresponding wavelength in turn, and will be displayed on the display. The laser light source of this series can provide 1310nm and 1550nm dual-wavelength laser output according to demand.

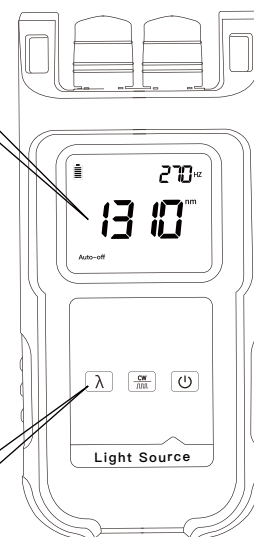

5 Carrier output

270 Hz 1000 Hz
2000 Hz

In the actual project, it is necessary to load the audio carrier in the optical signal to identify the optical fiber. The equipment contains three carrier frequencies, which are 270Hz, 1KHz, and 2KHz. After pressing the "modulated carrier" key, the equipment will load different carriers in sequence, and the display will be displayed at the same time. The current carrier frequency will be displayed on the screen.

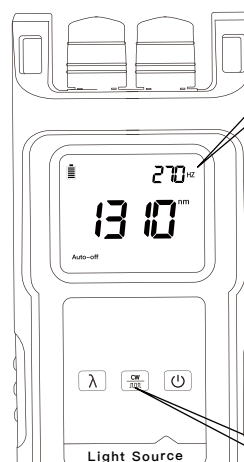

6 Products introduction

Fiber optic light source is characterized by stable output optical power, wavelength and spectral width with a small range of stable changes. Provide single and multi mode (850nm/1300nm/1310nm/1550nm) four-wavelength laser output. Mainly used for FTTX network and fiber optic testing. When combined with Optical power meter, it is used to measure optical power and end-to-end optical loss.

7 Products features

- 2.5mm universal interface
- Output power \geq -5dB
- Silica gel shell protection design, 2m anti-fall
- Automatic shutdown in 10 minutes


8 Products specification

Wavelength (nm)	850+1300+1310+1550nm (SM&MM)
Output Power	\geq -5dB
Optical connector	2.5mmuniversal (1.25mm LCOptional)
Power supply	Alkaline batteries(3 AA 1.5V batteries)
Stable output	\pm 0.05dB/15mins; \pm 0.1dB/ 8小时
Modulation frequency	CW, 270Hz, 1KHz, 2KHz
volume and weight	183*83*42mm/287g

Use environment

- Operating environment altitude:
areas below 2000m above sea level

9 Tips

 Please read all instructions and warnings before using this product. Irregular use will cause It will damage the product or personal safety.

- 1) Do not store this product in high temperature, strong light and strong magnetic field environment, do not put it pace in other harsh environments such as fire sources.
- 2) Improper use of the product may easily cause the product itself or may endanger personal property Safety.
- 3) If the consumer violates the product manual and improper use, the personal and financial Property damages will bear all consequences, and the company will not bear any legal responsibility.
- 4) Non-professionals are strictly forbidden to decompose this product.
- 5) Avoid using electrical appliances or loads that exceed the output current of this product (the circuit will protect Protection, no output).
- 6) Avoid strong physical effects, including knocking, throwing, trampling, squeezing, etc.